

Heat Seal Unit

Part number: SC1250

Designed specifically for sealing tear away protective shrink caps onto hydraulic hose and tube assemblies. Promote clean system integrity by minimising the ingress of contamination while assemblies are in transit, storage or during installation.

FEATURES

- Up to 1-1/4" Hydraulic hose capacity
- Adjustable timer
- Visual warning lights
- Cool down mode
- Auto cut off timer




SPECIFICATIONS

Model	SC1250
Unit Size	435 x 325 x 200mm
Unit Weight	13kg
Voltage	230VAC
Heater	< 600°C (Pre-set to 250°C)

Tear Away Protective Shrink Caps

TEAR AWAY PROTECTIVE SHRINK CAPS (PSC)	
Material	PVC
Working Temperature	-15°C - +80°C
Shrinkage Temperature - Begin - Complete	70°C 130°C
Melting Point	212°C
Storage Temperature	Lower than 60°C
Shrink Ratio	2:1

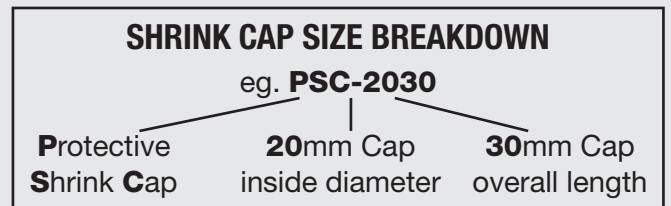

Part Number	Description	I.D. (mm)	Length (mm)	Cover Size (mm)	JIC	BSP	ORFS	DKL	DKO	FL	FLH
PSC-2030	SHRINK CAP 20X30MM YELLOW	20	30	12-18mm	07, 09	04		12, 14, 16	14, 16		
PSC-2840	SHRINK CAP 28X40MM YELLOW	28	40	22-26mm	12	06	09, 11	18, 22	18, 20		
PSC-3140	SHRINK CAP 31X40MM YELLOW	31	40	24-29mm	14	08	13	22	22	08	
PSC-3840	SHRINK CAP 38X40MM YELLOW	38	40	30-36mm	17	12	16	26, 30	24, 30	10	08
PSC-4650	SHRINK CAP 46X50MM YELLOW	46	50	34-44mm	21	16	19	36		12, 16	12
PSC-5260	SHRINK CAP 52X60MM YELLOW	52	60	41-50mm		20	23	45	36, 42	20	16
PSC-5860	SHRINK CAP 58X60MM YELLOW	58	60	49-56mm	26	24	27		52		20
PSC-6760	SHRINK CAP 67X60MM YELLOW	67	60	55-65mm	30		32	52		24	24
PSC-8060	SHRINK CAP 80X60MM YELLOW	80	60	64-78mm	40	32				32	32

Note: Cap to Thread suitability provided above are approximates and should be used as a guide only.