


MONOBLOCK VALVES SDM140 Series

Fitted with direct or pilot operated main pressure relief.
Independent load check per spool.
Available in parallel circuit only.
Optional carry-over port.
18mm Ø interchangeable spools.
Available with manual, electro-hydraulic, pneumatic, hydraulic pilot and cable spool control.

Applications:
Agricultural machinery, harvesters, front-loaders, earth movers, dumpers, shovels and mobile cranes.

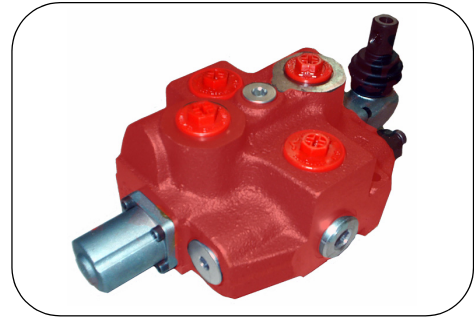

Part No.	No. of	Nominal Flow	Max. Press. P.A.B.	Max Press on 'T'	Ports BSPP P..T.	Ports BSPP A. B.	DIM A (mm)
	Spools						
SDM140/1/18	1	80	315	25	3/4"	1/2"	135
SDM140/2/2X18	2						180
SDM140/3/3X18	3						225
SDM140/4/4X18	4						270
SDM140/5/5X18	5						315
SDM140/6/6X18	6						360

The above with Cylinder Spool and Spring Centred. Standard handles included in the price

Options		
Type	Part No.	Description
1,2,3,4		Spool Options please refer to Page A 10
8	5V08110000	Spring Centre Kit
11	5V11110000	DETENT KIT - 3 POSITION
15	5V15110000	DETENT KIT 2 POSITION (0,1)
AE	XGIU536695	G 3/4 carryover sleeve
AEK	XGIU532465	Plug for closed centre circuit
LCB	5CLO308100	Joystick lever for 2 sections
		Cable Control - Please refer to Page A 44

