


FRONT-END LOADER VALVES

SDM122 Series For open and closed centre systems

DLM122 Series For load sense systems

Simple, compact and heavy duty design
 Fitted with main pressure relief and load check on each working section.
 Available with:
 Port relief and anticavitation valves.
 Power beyond port.
 16mm Ø interchangeable spools.
 Manual or cable spool control.

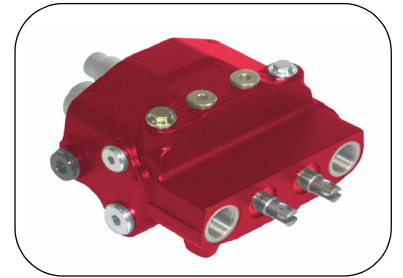

Part No.	No. Spools	Nom. Flow	Max. Pressure P,A,B	Max. Pressure on T	Ports BSP	
		L/Min	BAR	BAR	P, T, C	A & B
SDM122/2-P/1S13TQ81/1	2	80	250	10	3/4"	1/2"
DLM122/AP/113SL/18SL	2	80	250	10	3/4"	1/2"

Options		
Type	Part No.	Description
8MA	5V08108240	Spool Position - Spring Return to Neutral(Standard)
13	5V13108040	Detent in Float & Spring Return to Neutral
U1/U2	X222422170	Port Relief & Anti-Cavitation Check 101 to 170 bar
U1/U2	X222422250	Port Relief & Anti-Cavitation Check 171 to 250 bar
U1/U2	X222421250	Port Relief & Anti-Cavitation Check 201 to 250 bar
AET	3XTAP732201	Plug - Open Centre (Standard on SDM122)
AE	XGIU536692	Plug - High Pressure Carry Over(SDM122)
TQ		Cable Function - Please refer to Page A 44

