


Solenoid Valves CETOP 3

DHE Series

Spool Type Valves Direct Solenoid Operated
Wet Armature Solenoids.
4 way, 2 or 3 position.

Flow rates are based on a 10 bar pressure drop using oil to ISO VG 46 at 50°C

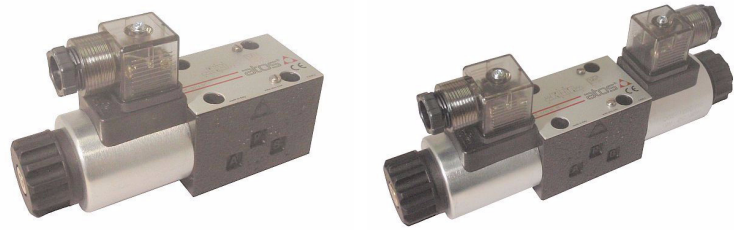

SINGLE SOLENOID 2 POSITION NB: valve pricing includes coil, LED coil connector & bolts

CIRCUIT	Part No.	TYPE	Cross Over	PRESSURE			Nominal Flow
				P.A.B	T(DC)	T(AC)	L/Min
	DHE-0610-12VDC DHE-0610-24VDC DHE-0610-230VAC	SPRING CENTRED	N/A	350	210	160	35
	DHE-0611-12VDC DHE-0611-24VDC DHE-0611-230VAC	SPRING CENTRED	N/A				25
	DHE-0613-12VDC DHE-0613-24VDC DHE-0613-230VAC	SPRING CENTRED	N/A				25
	DHE-0614-12VDC DHE-0614-24VDC DHE-0614-230VAC	SPRING CENTRED	N/A				20
	DHE-0630/2-12VDC DHE-0630/2-24VDC DHE-0630/2-230VAC	SPRING OFFSET	OPEN				25
	DHE-0631/2-12VDC DHE-0631/2-24VDC DHE-0631/2-230VAC	SPRING OFFSET	CLOSED				25

DOUBLE SOLENOID 3 POS. SPRING CENTRED NB: valve pricing includes coils, LED coil connectors & bolts

CIRCUIT	Part No.	PRESSURE			Nom. Flow
		P.A.B	T(DC)	T(AC)	L/Min
	DHE-0710-12VDC DHE-0710-24VDC DHE-0710-230VAC	350	210	160	35
	DHE-0711-12VDC DHE-0711-24VDC DHE-0711-230VAC				25
	DHE-0713-12VDC DHE-0713-24VDC DHE-0713-230VAC				25
	DHE-0714-12VDC DHE-0714-24VDC DHE-0714-230VAC				20

NB: Valve Pricing **includes** coils, led coil connectors and bolts.

NB: Nom. flow rating @ 43 Centistokes and 4 BAR pressure drop.

NB: Valve only bolt length is 50mm

COILS	
Part No.	VOLTAGE
SP-COE-12DC/10	12DC
SP-COE-24DC/10	24DC
SP-COE-110DC/10	110DC
SP-COE-110/50/60AC/10	110AC
SP-COE-230/50/60AC/10	230AC

COIL CONNECTORS	
Part No.	TYPE
SP-666	AC or DC Standard
SP-669	AC in rectified to DC
SP-KA-DC	DC Connector with LED
SP-KA-AC	AC Connector with LED

BOLT KITS	
Part No.	
BK-M5X30	
BK-M5X70	
BK-M5X110	
BK-M5X150	