
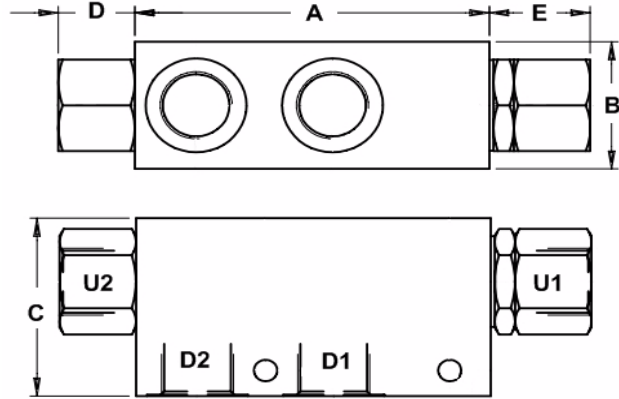


LINE MOUNT VALVES

SINGLE PILOT OPERATED CHECK VALVES



Steel body
Suitable for mounting direct to a cylinder.

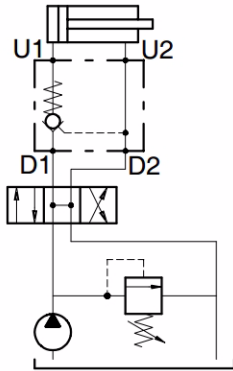

Part No.	Ports BSPP	Max. Pressure BAR	Standard Pilot Ratio	Optional Pilot Ratios	Dim. (mm)					Nom Flow L/min
					A	B	C	D	E	
VBPSL-14/P4/PA4/AC	1/4"	350	4:1	3:1	70	30	40	-	14.5	15
VBPSL-38/P4/PA4/AC	3/8"	300	4:1	6.3:1,7.5:1	90	35	50	22	30	35
VBPSL-12/P4/PA4/AC	1/2"		4:1	6.3:1,7.5:1	90	35	50	22	30	50
VBPSL-34/P4/PA4/AC	3/4"		4.3:1	nil	130	50	70	28	37	100

DOUBLE PILOT OPERATED CHECK VALVES

Steel body
Suitable for mounting direct to a cylinder.

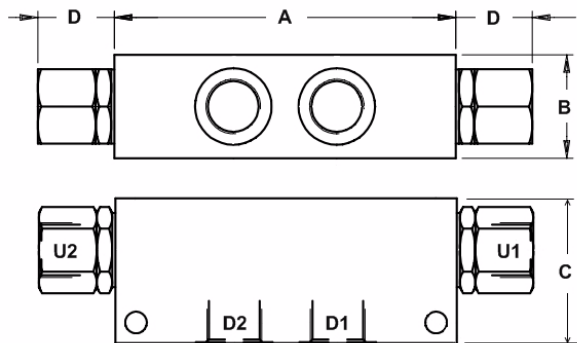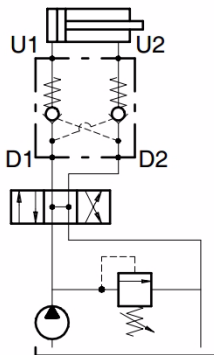

Part No.	Ports BSPP	Max. Pressure BAR	Standard Pilot Ratio	Optional Pilot Ratios	Dim. (mm)				Nom Flow L/min
					A	B	C	D	
VBPDL-14/P4/PA4/AC	1/4"	210	4.5:1	2.5:1	81	30	40	14.5	15
VBPDL-38/P4/PA4/AC	3/8"		4:1	6.3:1,7.5:1	110	35	50	30	35
VBPDL-12/P4/PA4/AC	1/2"		4:1	6.3:1,7.5:1	110	35	50	33	50
VBPDL-34/P4/PA4/AC	3/4"		4.3:1	nil	165	50	70	37	100