

COMPLETE HYDRAULIC SOLUTIONS



MOBILE V-SERIES HEAT EXCHANGERS

The V-series has an optimum efficiency used for hydraulic system cooling on mobile and agricultural machines.




FEATURES


- Basic solution composed by the cooler element only and its IP67 DC Fan.
- Fixed thermostat is fitted on all V Series models.
- Turning the fan on & off can be controlled by the fixed thermostat with contact Normally Open (IP).
- Integrated with by-pass valve to prevent cooler element burst as a result of over-pressure.
- 95% of mobile cooler built with rust-proof components for sustainability.

PART NUMBER	TECHNICAL DATA								
	V	Kw	A	RPM	Ø Fan	dB (A)	IP	Max LPM	Kg
2MV112301	12V DC	0.09	7.5	3950	190	73	68	100	5.3
2MV212301	12V DC	0.09	7.7	2410	280	71	68	120	7.5
2MV312301	12V DC	0.19	15.6	2810	305	74	68	140	10.5
2MV412301	12V DC	0.18	15.2	2210	385	76	68	160	16.5
2MV124301	24V DC	0.08	3.3	3900	190	76	68	100	5.3
2MV224301	24V DC	0.08	3.4	2350	280	73	68	120	7.5
2MV324301	24V DC	0.18	7.6	3040	305	79	68	140	10.5
2MV424301	24V DC	0.19	8.1	2390	385	79	68	160	16.7


PERFORMANCE & PRESSURE DROP DIAGRAM

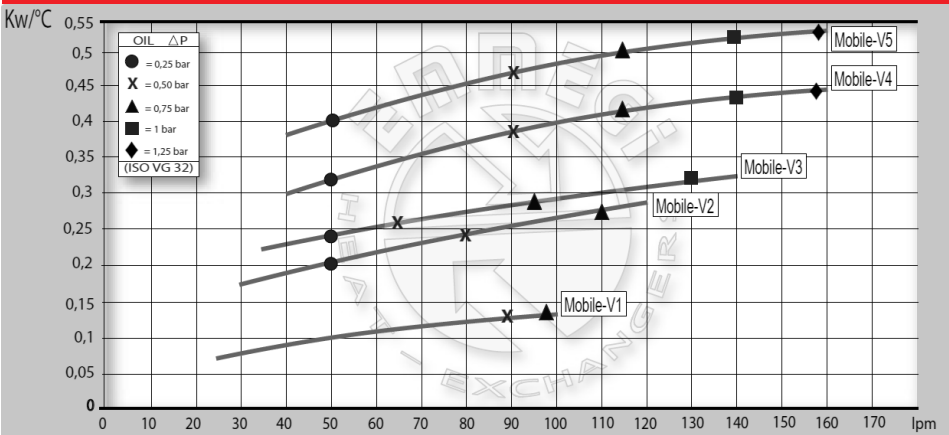

FIXED THERMOSTAT

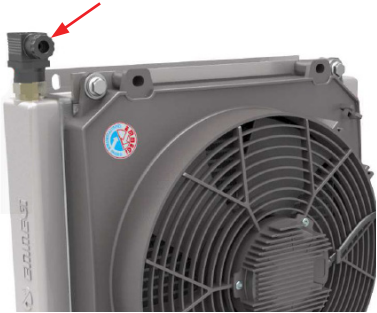

BY-PASS VALVE

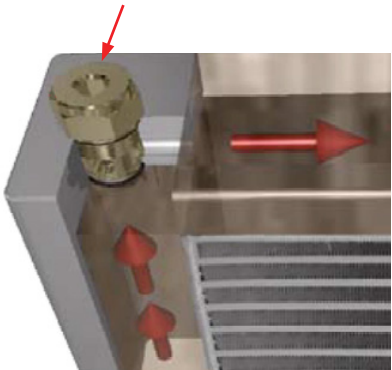

Adelaide 08 8228 2411 • Sydney 02 8814 2100
 Newcastle 02 4964 2123 • Brisbane 07 3022 3700 • Emerald 07 4988 1800
 Mackay 07 4847 8800 • Melbourne 03 8793 6400
 Laverton 03 9371 9000 • Perth 08 6216 4600 • Tasmania 03 6427 0908
www.southcott.com.au

