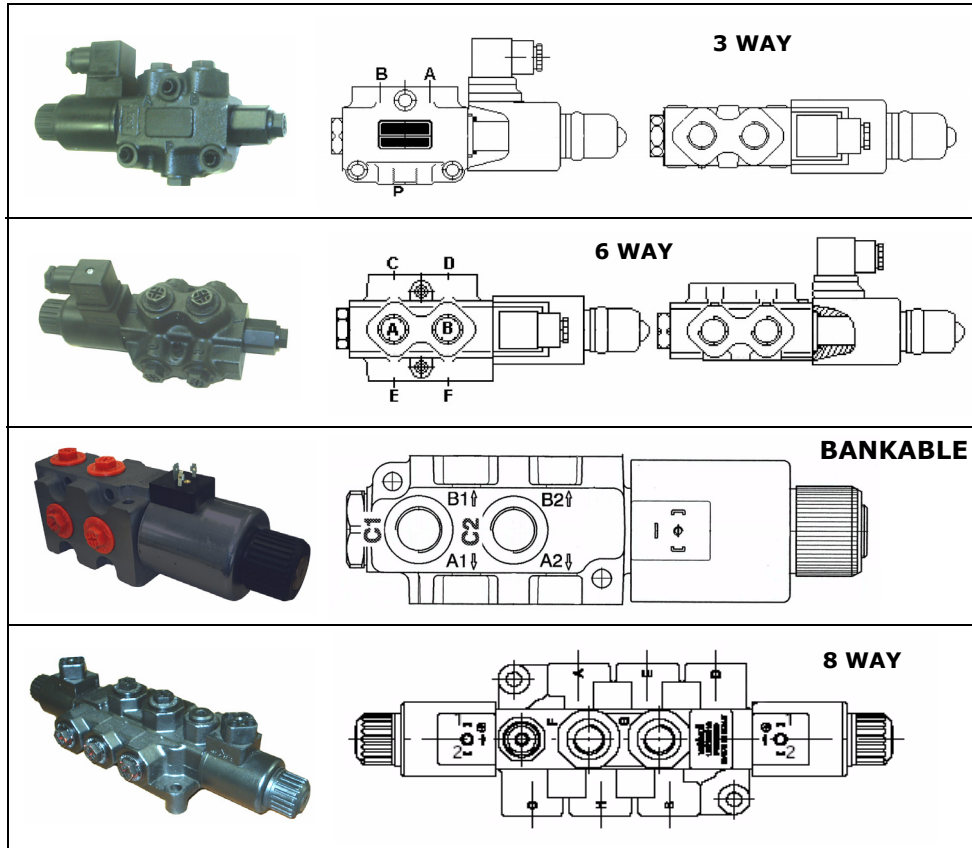


# DFE Series

## DFE Diverter Valves-Solenoid Operated

2 position diverter valves with solenoid control. The body is made of special cast iron and the spool of hardened steel. The solenoid is fitted with an emergency manual push button which can be used if there is a loss of power supply.



### ORDERING CODE

DFE20 / 6B - 18ES - Y - 12VDC

SIZE

NO. OF PORTS

SPOOL TYPE - A = Open in Crossover, B = Closed in Crossover

ELECTRONIC SOLENOID CONTROL








Y = Drained, W = No Drain





VOLTAGE: 12V DC





24V DC


Coils to Suit DFE Series			
To Suit	Volts	Watts	Part No.
DFE052	12VDC	40	<b>4SOL515012</b>
DFE052	24VDC	40	<b>4SOL515024</b>
DFE10	12VDC	60	<b>4SOL516012</b>
DFE10	24VDC	60	<b>4SOL516024</b>
DFE20/DFE140	12VDC	60	<b>4SOL519112</b>
DFE20/DFE140	24VDC	60	<b>4SOL519124</b>

COIL CONNECTORS	
Part No.	TYPE
SP-666	Std Connector
SP-KA-DC	Connector with LED

Part No.	Circuit	No. of Ports	Max. L/Min	Max. Pressure bar		Ports BSPP
				without draining	with draining	
DFE052/3A-18ES-Y-12VD DFE052/3A-18ES-Y-24VD		3	60	200	315	3/8"
DFE052/3B-18ES-Y-12VD DFE052/3B-18ES-Y-24VD						
DFE052/3D-18ES-Y-12VD DFE052/3D-18ES-Y-24VD						
DFE052/3E-18ES-Y-12VD DFE052/3E-18ES-Y-24VD						
DFE052/6A-18ES-Y-12VD DFE052/6A-18ES-Y-24VD		6				
DFE052/6B-18ES-Y-12VD DFE052/6B-18ES-Y-24VD						
DFE052/8B-8ES3-W-12VD		8			N/A	

Part No.	Circuit	No. of Ports	Max. L/Min	Max. Pressure bar		Ports BSPP
				without draining	with draining	
DFE10/3A-18ES-Y-12VDC DFE10/3A-18ES-Y-24VDC		3	90	200	315	1/2"
DFE10/3B-18ES-Y-12VDC DFE10/3B-18ES-Y-24VDC		3				
DFE10/6A-18ES-Y-12VDC DFE10/6A-18ES-Y-24VDC		6				
DFE10/6B-18ES-Y-12VDC DFE10/6B-18ES-Y-24VDC		6				

Part No.	Circuit	No. of Ports	Max. L/Min	Max. Pressure bar		Ports BSPP
				without draining	with draining	
DFE20/3A-18ES-Y-12VDC DFE20/3A-18ES-Y-24VDC		3	140	200	315	3/4"
DFE20/3B-18ES-Y-12VDC DFE20/3B-18ES-Y-24VDC						
DFE20/6A-18ES-Y-12VDC DFE20/6A-18ES-Y-24VDC		6				
DFE20/6B-18ES-Y-12VDC DFE20/6B-18ES-Y-24VDC						

Bankable Type Part No.	Circuit	No. of Ports	Max. L/Min	Max. Pressure bar		Ports BSPP
				without Draining	with Draining	
DFE140/6B-18ES-W-12DC (Without Draining)		6	80	200	315	1/2"
DFE140/6B-18ES-Y-12DC (with Draining)						